

EXPANDED METAL - ISTEKNUTI METAL

METAL TEHNOLOGIJA D.O.O.

MANHATTAN XS




Dati tecnici - Technical data

(1:2)

Sagoma Maglia Mesh Shape	Maglia Mesh DL LWD [mm]	Spessore Thickness [mm]	Spessore tot. Total thickness [mm]	Formato Hmax//DL Dimension Hmax//LWD [mm]	○ Peso Weight [Kg/mq]	● Peso Weight [Kg/mq]	Vuoto/Pieno Frontale Front Open Area % (*)	Vuoto/Pieno Max Max Open Area % (*)
Romboidale	250	1,5	~ 33	3000	1,8	5,2	64	86
Rhomboidal	250	2	~ 33	3000	2,4	7,0	64	86
	250	3	~ 33	3000	3,6	10,5	64	86

○ ALLUMINIO, ALUMINIUM / ● FERRO, ACCIAIO ZINCATO, ACCIAIO INOX, MILD STEEL, GALVANIZED STEEL AND STAINLESS STEEL

Open area values have been calculated in our laboratory employing an innovative technology using beams of light which allows measuring frontal open area percentage with great accuracy. This value varies as the mesh inclination changes in relation to sunlight.

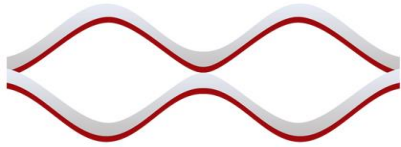

EXPANDED METAL - ISTEKNUTI METAL

METAL TEHNOLOGIJA D.O.O.

MANHATTAN XS

Frangisole - Sunscreen

Vista dall'interno
View from inside

Shadow



Frontal Open Area



Max Open Area



MANHATTAN XS

MAX
OPEN AREA
86%

Vista dall'esterno
View from outside

Max Open Area



Frontal Open Area



Shadow



Install a shading means using an item that gives the possibility of shielding all or part of the passage of sunlight while allowing the passage of air. Expanded metal is by nature a material that contains these two features, while having the advantage of being able to add an aesthetic and architectural value to each application.